CHIEF XD EN DIMENSIONAL TABLE

FLOW RATE (LPM @ BAR)	TYPE	BASE (COUPLING)	(IN MILLIMETERS)								WEIGHT (KG.)	
			OVERALL LENGTH (O. L.)		OVERALL LENGTH MINUS COUPLING (O. L. M. C.)		BUMPER DIA. (DIA.)	BALE HANDLE WIDTH (W.)	PISTOL GRIP HEIGHT (P. G. H.)	OVERALL HEIGHT (O. H.)		
			MAX (S.S.)	MIN (FLUSH)	MAX (S.S.)	MAX (FLUSH)					NO PISTOL GRIP	PISTOL GRIP
125 @ 6 150 @ 6 175 @ 6 230 @ 6 250 @ 4 250 @ 6	NOZZLE	FREE SWIVEL - 1.0" (25 MM)	245	230	219	204	79	109	146	233	1.3	1.6
500 @ 4 500 @ 6	NOZZLE	FREE SWIVLE - 1.5" (38 MM)	249	229	214	194	99	109	146	233	1.6	1.9
		FREE SWIVEL - 1.0" (25 MM) X 2.5" (65 MM) BRITISH INSTANTANEOUS	347	327							1.8	2.1
		FREE SWIVEL - 1.0" (25 MM) X 2.0" (52 MM) BSP MALE	336	316							1.8	2.1
		FREE SWIVEL - 1.0" (25 MM) X 2.0" (52 MM) BSP MALE WITH 2.0" (52 MM) BSP FEMALE X 2.0" (52 MM) STORZ	359	339							2.1	2.4

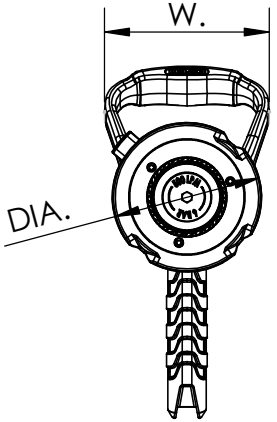

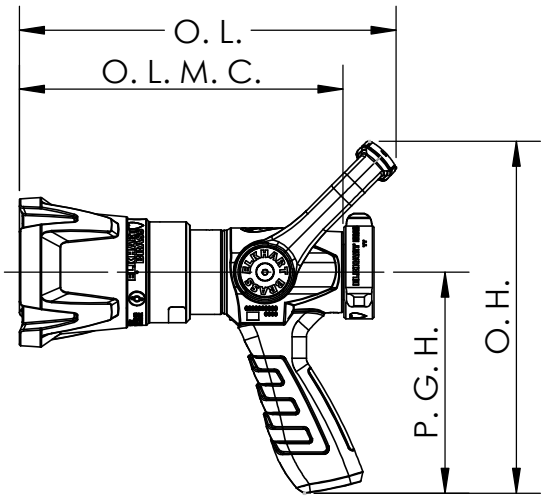

ELKHART BRASS
Fire Fighting Equipment

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ELKHART BRASS MFG CO., INC. AND MAY NOT BE USED TO PRODUCE ANY PARTS, ASSEMBLIES OR PRODUCTS DESCRIBED HEREIN WITHOUT EXPRESS WRITTEN PERMISSION